

SUNDY

PAR56 SWIMMING POOL LIGHT



CE  ERP **IP68**

SHENZHEN SUNDY LIGHTING CO., LTD.

PAR56 Swimming Pool Light



(ABS)



(ABS)



(ABS)




(316/V4A Stainless Steel)

PAR56 SWIMMING POOL LIGHT


Patent No.: 201730344633.9

ABS >>>

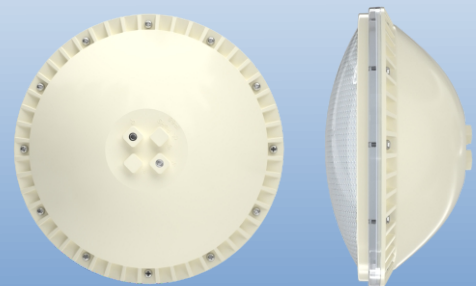

FEATURE

- ◆ Patented design-privdte tooling/mould
- ◆ ABS
- ◆ Structural IP68 Waterproof
- ◆ Size - 177*95mm
- ◆ RGB/RGBW/RGBWW synchronization
- ◆ Single color RGB/RGBW/RGBWW
- ◆ Remote/WIFI/DMX control applicable



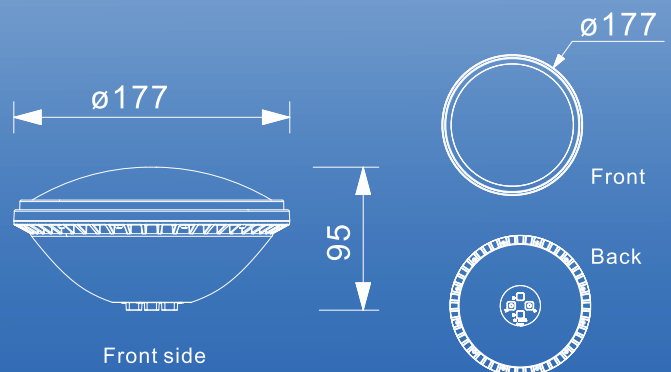


Model No.	Power	Voltage	Luminous Flux	LED Type	Color
SP56-18W-A (S5RGBWW)	18±1W	12V AC/DC	950±10%LM	RGBWW 5in1	RGBWW
SP56-18X4W-A	25±1W	12V AC/DC	1500±10%LM	RGBW 4in1	RGBW
SP56-15W-A (S5RGBW)	15±1W	12V AC/DC	750±10%LM	RGBW 4in1	RGBW
SP56-18X3W-A	25±1W	12V AC/DC	1400±10%LM	RGB 3in1	White/RGB
SP56-120S5-A	18±1W	12V AC/DC	1920±10%LM	SMD5050	White/RGB
SP56-20W-A	20±1W	12V AC/DC	2200±10%LM	SMD3030	White
SP56-12W-A	12±1W	12V AC/DC	1300±10%LM	SMD3030	White

PAR56 SWIMMING POOL LIGHT


316/V4A Stainless Steel »»

Patent No.: 201730344109.1

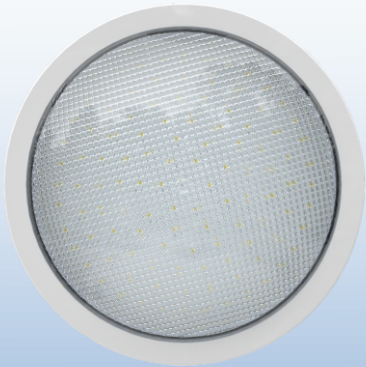

FEATURE

- ◆ Patented design-privdte tooling/mould
- ◆ 316/V4A Stainless Steel
- ◆ IP68 - Epoxy/resln sealing
- ◆ Size - 177*102mm
- ◆ RGB/RGBW/RGBWW synchronization
- ◆ Single color RGB/RGBW/RGBWW
- ◆ Remote/WIFI/DMX control applicable


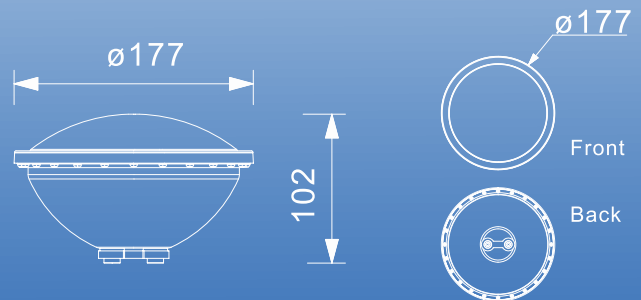


Model No.	Power	Voltage	Luminous Flux	LED Type	Color
SP56-30W-S (S5RGBWW)	30±1W	12V AC/DC	1430±10%LM	RGBWW 5in1	RGBWW
SP56-18W-S(S5RGBWW)	18±1W	12V AC/DC	950±10%LM	RGBWW 5in1	RGBWW
SP56-18X4W-S	30±1W	12V AC/DC	1300±10%LM	RGBW 4in1	RGBW
SP56-15W-S(S5RGBW)	15±1W	12V AC/DC	750±10%LM	RGBW 4in1	RGBW
SP56-18X3W-S	25±1W	12V AC/DC	1400±10%LM	RGB 3in1	White/RGB
SP56-120S5-S	18±1W	12V AC/DC	1920±10%LM	SMD5050	White/RGB
SP56-70W-S	70±1W	12V AC/DC	8120±10%LM	SMD3030	White
SP56-35W-S	35±1W	12V AC/DC	3950±10%LM	SMD3030	White

PAR56 SWIMMING POOL LIGHT



Flat design-resin filled »»»

Patent No.: 201730622915.0

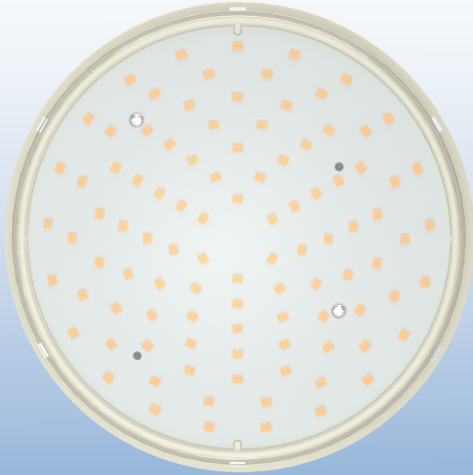

FEATURE


- ◆ Patented design-privdte tooling/mould
- ◆ ABS
- ◆ Resin filled - IP68
- ◆ Super slim - 177*30.5mm
- ◆ RGB synchronization
- ◆ Single color or RGB
- ◆ Remote/WIFI/DMX control applicable

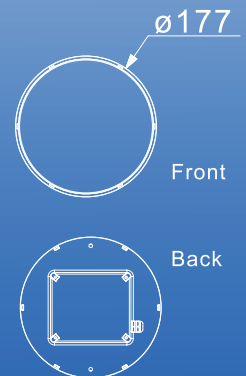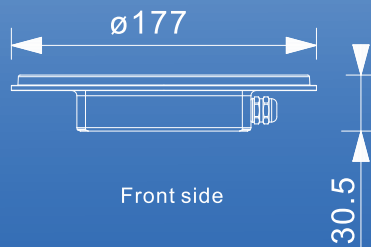

Model No.	Power	Voltage	Luminous Flux	LED Type	Color
SP56-25W-B(S2835)	25±1W	12V AC/DC	2700±10%LM	SMD2835	White
SP56-25W-B(S2835)	25±1W	12V AC/DC	900±10%LM	SMD2835	RGB
SP56-25W-B(S5RGBW)	25±1W	12V AC/DC	900±10%LM	SMD5050(4 IN 1)	RGBW
SP56-25W-B(S5RGBWW)	25±1W	12V AC/DC	900±10%LM	SMD5050(5 IN 1)	RGBWW



PAR56 SWIMMING POOL LIGHT

Flat design-resin filled >>>

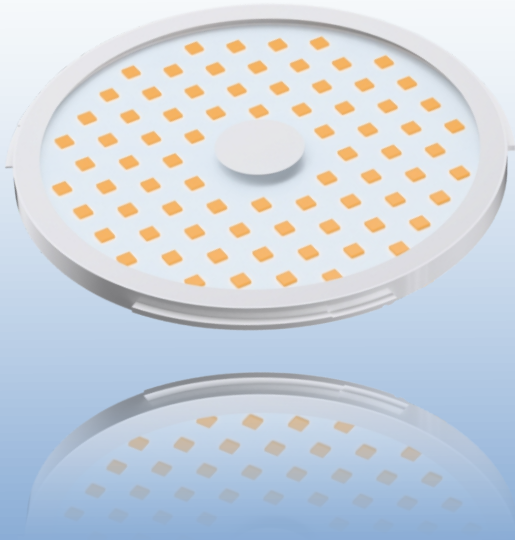

FEATURE





- ◆ Led Chip: SMD2835
- ◆ Material:ABS
- ◆ Beam Angle: 120
- ◆ Structure water-proof -IP68
- ◆ Size:Ø170x10mm
- ◆ Cable: 2m VDE rubber cable
- ◆ Single color or RGB

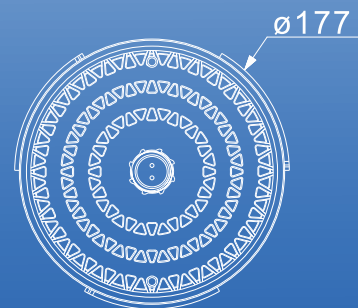

Model No.	Power	Voltage	Luminous Flux	LED Type	Color
SP56-20W-C	20±1W	12V AC/DC	2200±10%LM	SMD2835	White
SP56-20W-C	20±1W	12V AC/DC	980±10%LM	SMD2835	RGB
SP56-30W-C	30±1W	12V AC/DC	3200±10%LM	SMD2835	White
SP56-30W-C	30±1W	12V AC/DC	1400±10%LM	SMD2835	RGB



CONTROL METHODS

1. 100% synchronization(2-wire connection): color changing with RGB/RGBW/RGBWW controller or remote.
Max can be 100m 100% synchronization for color and speed changing.
2. Remote and Switch control(2-wire connection): RGB/RGBW/RGBWW color changing with RF remote or switch(switch on/off), every lamp with remote.
3. External control(4/5/6 wire connection): color changing with external RGB/RGBW/RGBWW controller or remote or Android/iOS system smart phone.
4. DMX Control: color changing with external DMX decoder.

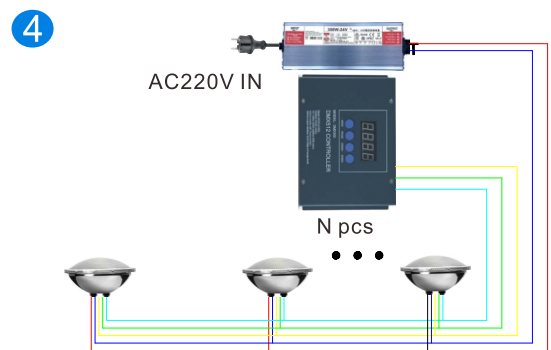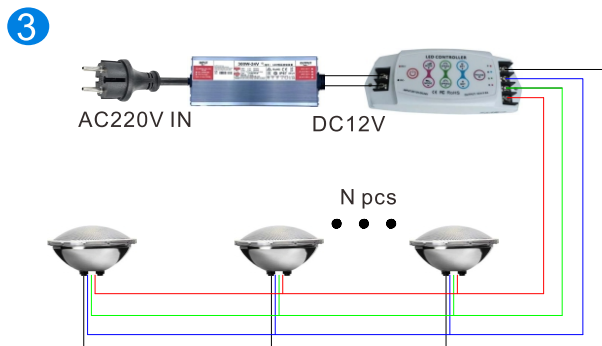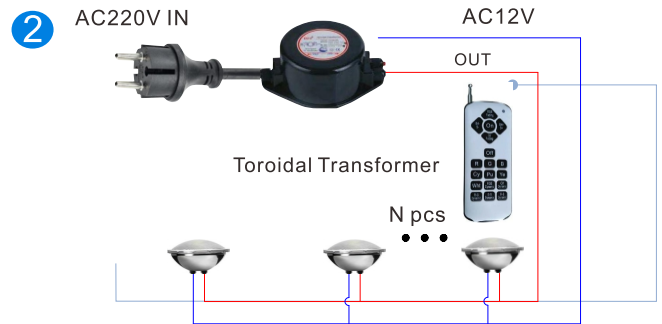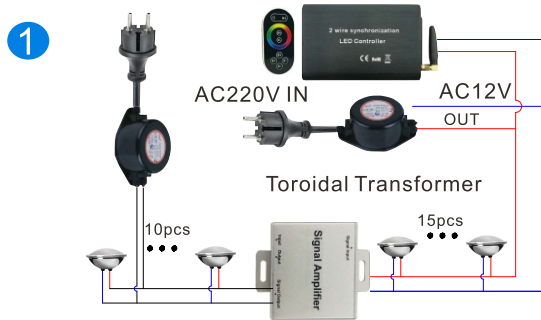


OPTICS

Tech.Support: Tell us the Pool length, width, height and the usage. We have engineer team to respond the DIALUX simulations for lights quantity calculation and effects.ies

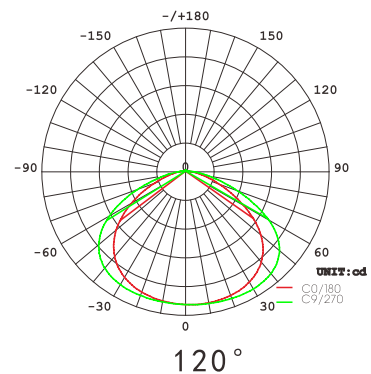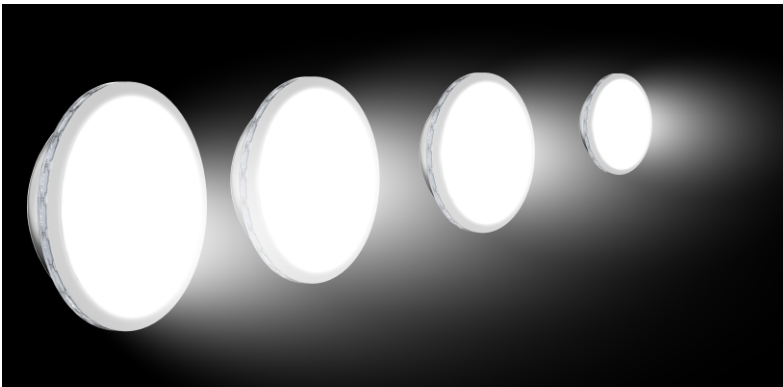

BEAMCOLOR

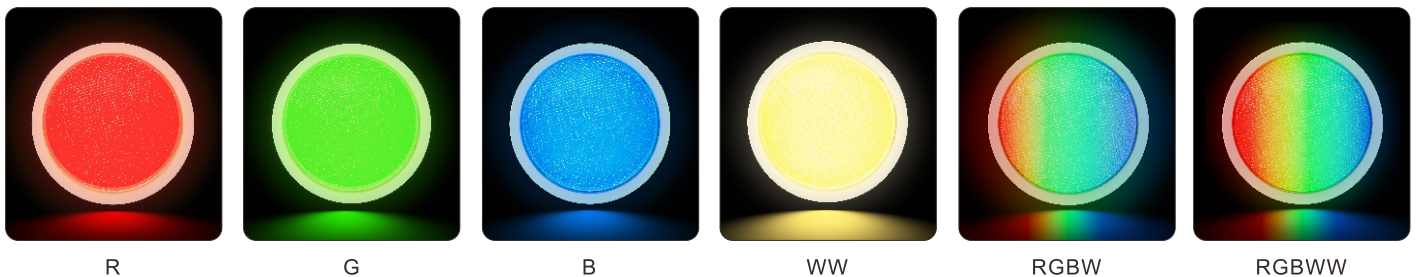

APPLICATION



CAUTION:

- 1.Underwater use only.
- 2.Work with toroidal transformer(50-60 Hz),electronic transformer might cause damage.
- 3.Do not carry lamp by cable, which might cause water-leakage.

SHENZHEN SUNDY LIGHTING CO., LTD.

Skype: sundylighting@outlook.com

Email:info@sundylighting.com <http://www.sundylighting.com>

Address: 5F, Building A2, No.1 Minying Road, Shiyan Town, Bao'an District, Shenzhen, P. R. China.

